

TECHNICAL SPECIFICATION

Downlight fixtures for CFL - GL213E



Technical data

Nominal voltage: 230V / 50-60Hz

• Lamp power: max.2X20W

• Lampholder designation: E27

• Type of light source (not included commercial kit): 2pcs Compact fluorescent lamps with socket E27, max.20W

• Body material: Sheet steel with aluminium ring

• Diffuser: Glass with matt dots

• Reflector: Aluminium mirror

• Type of Installation : Surface mounting for indoor use

• Body color: white, satin nickel

Dust and humidity protection level: IP20

• Protection against electric shock: I

• Protection against ignition and fire: Class F



Areas of application

- Modern Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

Product benefits

- Lightweight body
- Simple appearance
- Easy installation


Variants and dimensions



Model	Size (mm)		Colour	Catalogue	Packing
	Diameter	Height	body	number	(pcs)
GL 213E	266	65	white	9299213E/W	10
GL 213E	266	65	satin nickel	9299213E/SN	10



Energy efficiency

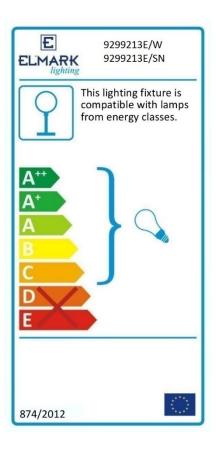

Barcodes

Barcode	Catalogue number	
3800131169860	9299213E/W	
3800131169877	9299213E/SN	

Standards

EN 60598-1

EN 60598-2-1



