

## TECHNICAL SPECIFICATION

### Fluorescent fixtures – GALA



#### Technical data

- Nominal voltage: 230V/50-60Hz
- Fluorescent tube type (not included in the commercial kit): T8/G13
- Power supply: Electronic control gear
- Product colour: White
- Body: White powder- polymer coated sheet steel
- Louvre: Aluminum, double parabolic, type V
- Installation: Recessed mounting or Surface mounting
- Dimmable: No
- Lampholder designation: G13
- Type of connection: Terminal, 3-pole, max. 2,5 mm<sup>2</sup>
- Protection against dust and humidity: IP21
- Protection class: I
- Surface requirements: Class F


## Product benefits

- Considerable energy saving
- Efficient and stable light distribution
- Unobtrusive and good uniform lighting

## Areas of application

- Commercial buildings
- Administrative buildings
- Banks
- Hospitals
- Education facilities

## Variants and dimensions

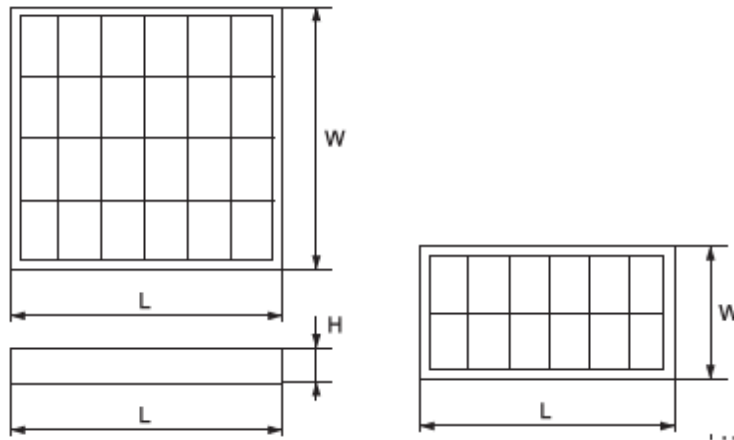



- GALA BM (recessed mounted fixture)

Watt	Colour body	Size (mm)			Ballast	Catalogue number	Packing (pcs)
		Length	Width	Height			
2X18W	White	595	295	70	electronic	9GBME218	1
4X18W	White	595	595	70	electronic	9GBME418	1
2X36W	White	1195	295	70	electronic	9GBME236	1

- GALA OM (surface mounted fixture)

Watt	Colour body	Size (mm)			Ballast	Catalogue number	Packing (pcs)
		Length	Width	Height			
2X18W	white	630	330	70	electronic	9GOME218	1
4X18W	white	630	630	70	electronic	9GOME418	1
2X36W	white	1230	330	70	electronic	9GOME236	1

## Luminous distribution curves

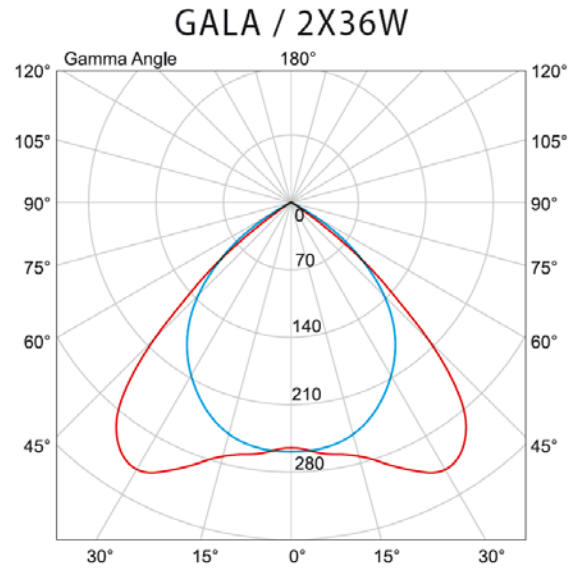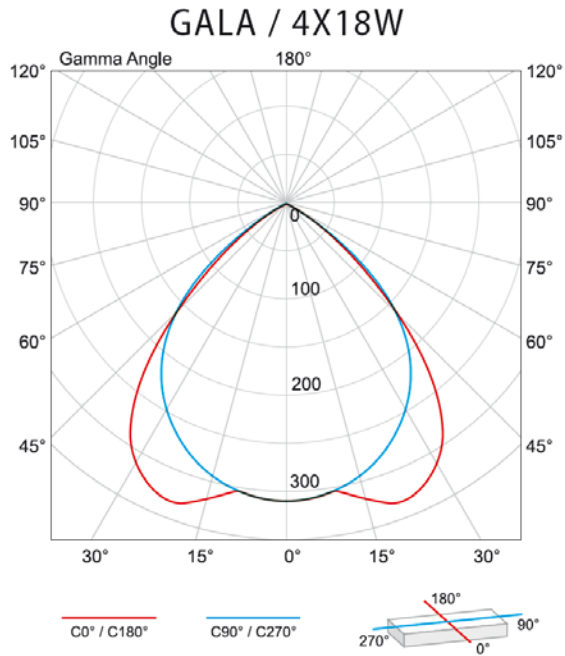

## Energy efficiency

**ELMARK lighting** 9GBME218  
9GBME418  
9GBME236

This lighting fixture is compatible with lamps from energy classes.

**A<sup>++</sup>**  
**A<sup>+</sup>**  
**A**  
**B**  
~~**C**~~  
~~**D**~~  
~~**E**~~

874/2012

**ELMARK lighting** 9GOME218  
9GOME418  
9GOME236

This lighting fixture is compatible with lamps from energy classes.

**A<sup>++</sup>**  
**A<sup>+</sup>**  
**A**  
**B**  
~~**C**~~  
~~**D**~~  
~~**E**~~

874/2012

## Barcodes

Barcode	Catalogue number
3800131165893	9GBME218
3800131165909	9GBME418
3800131165916	9GBME236
3800131165923	9GOME218
3800131165930	9GOME418
3800131165947	9GOME236

## Standards

EN 55015

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11;

EN 60598-1; EN 60598-2-1

