

TECHNICAL SPECIFICATION

Fluorescent fixture – SANA



Technical data

- Nominal voltage: 230V/50-60Hz
- Fluorescent tube type (not included in the commercial kit): T8/G13
- Power supply: Electronic control gear
- Product colour: White
- Housing: White powder coated sheet metal
- Diffuser: Thermoplastic ABS
- Installation : Surface mounting
- Dimmable: No
- Lampholder designation: G13
- Type of connection: Terminal, 3-pole, max. 2,5 mm²
- Protection against dust and moisture: IP21
- Protection against electric shock : I

Product benefits

- Optimum starting and operation mode to fluorescent tubes
- Energy saving
- Homogenous light distribution
- No stroboscopic effect upon monophase power supply
- Flicker free
- Absolutely noiseless
- Pleasant light emission
- Compact and stylish design
- Easy tube replacement and cleaning

Area of applications


- Commercial buildings
- Administrative buildings
- Banks
- Hospitals
- Education facilities

Variants and dimensions



| Watt | Colour body | Size (mm) | | | Ballast | Catalogue number | Packing (pcs) |
|-------|-------------|-----------|-------|--------|------------|------------------|---------------|
| | | Length | Width | Height | | | |
| 1X18W | white | 637 | 105 | 40 | electronic | 940118 | 12 |
| 1X36W | white | 1245 | 105 | 40 | electronic | 940136 | 12 |
| 2X18W | white | 637 | 150 | 45 | electronic | 940218 | 6 |
| 2X36W | White | 1245 | 150 | 45 | electronic | 940236 | 6 |

Energy efficiency

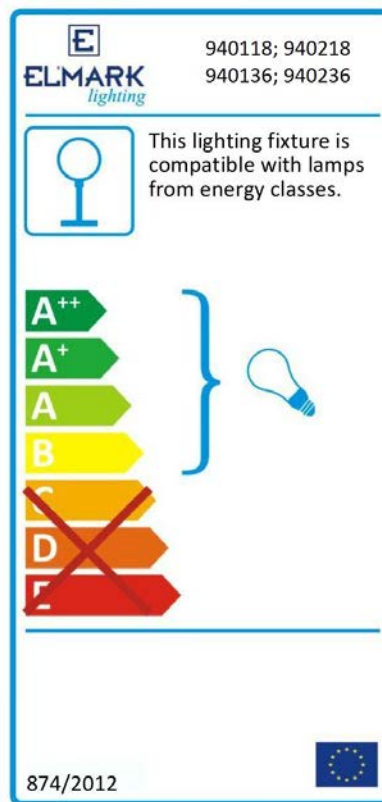

Barcodes

| Barcode | Catalogue number |
|---------------|------------------|
| 3800131160416 | 940118 |
| 3800131160423 | 940136 |
| 3800131160430 | 940218 |
| 3800131160447 | 940236 |

Standards

EN 55015

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11;

EN 60598-1; EN 60598-2-1

