

TECHNICAL SPECIFICATION

LED Lamp - LEDJ118



Technical data

- Nominal voltage: 230V/50Hz
- Power: 7.5W
- Colour temperature: 4000K
- LED type: SMD2835
- Light source: Epistar Taiwan
- Base: R7s
- Beam Angle: 120°
- Colour rendering index: Ra≥80
- Average Lifetime: 30 000h
- Switch on/off > 20000


Areas of application

- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings
- Ideal for emphasizing and accentuating the structure of a room

Product benefits


- Lower maintenance cost thanks to longer lifetime
- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Instant-on light.

Variants and dimensions

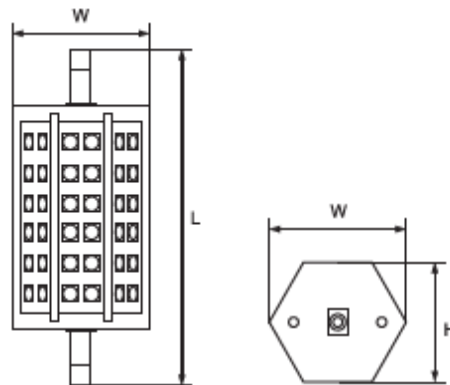

Watt	Colour	LED chip lumens (lm) / LED(pcs)	LED lamp lumens (lm)	Colour temp. (K)	Size (mm)			Catalogue number	Packing (pcs)
					L	W	H		
7.5W	white	25/36	700	4000	118	51	31	99LED444	50

Energy efficiency

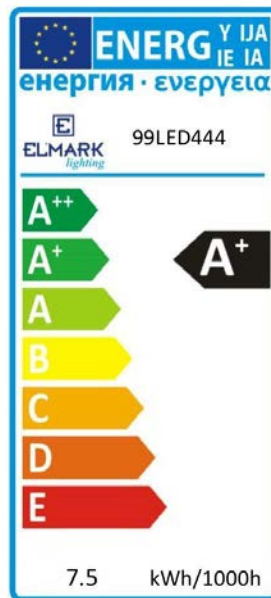

Barcodes

Barcode	Catalogue number
3800131178794	99LED444

Standards

EN 55015

EN 61000-3-2; EN 61000-3-3; EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11

EN 61547

EN 62560

