

TECHNICAL SPECIFICATION

Auxiliary contacts LT03-DN11



Description:

Providing on necessity additional number of plug points and are mounted sideward to the movable part of the magnetic cores of contactors of the series LT1 D. Variants with two additional plug points NO and NC are offered.

Functions:


- expanding the number of the operational plug points
- switching on simultaneously with the rest of the contact system of the contactor

Technical data:

- Environment operational regime: AC 3
- Insulation voltage: 690V
- Double connector: screw connector

- Connection
 - flexible conductors with or without cable end
 - solid conductors
- Mounting method
 - mounting position – sideward to the contactor
- Plastic: resistant to UV and non-burning (self-extinguishing material)

Dimensions:

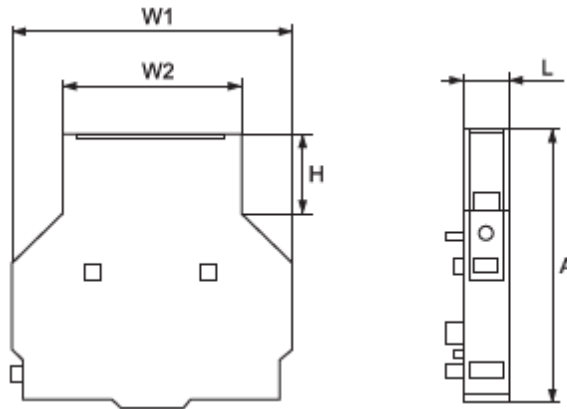

W1	W2	H	L	A
73	48	22	12.5	72

Type	Rated current	Section of the conductor(mm ²)	Catalogue number
LT03 – DN11	6A	0.5 – 1	23311

